


### Features

- Bi-metal immersion temperature switch
- Factory preset temperature
- Direct action contacts/minimum hysteresis
- Gold diffused, fine silver contacts
- Available in a wide range of configurations
- Economical and compact
- NEMA 4, 13

### Operating Specifications

<b>Set Point Range</b>	40° — 300°F	(4° — 149°C)
<b>Set Point Tolerance</b>	±5°F	(2.8°C)
<b>Maximum Temperature</b>	325°F	(163°C)
<b>Current Rating</b>	3 A @ 240 VAC	2 A @ 24 VDC (Resistive)
<b>Probe Length</b>	1"	
<b>Media Connection</b>	See Order Chart Below for Options	
<b>Circuit Form</b>	SPST-NO or SPST-NC	
<b>Electrical Connection</b>	See Order Chart Below for Options	
<b>Maximum External Pressure</b>	5000 PSI	

### How to Order (Example: Part Number: **TT - D3A - 100R / WL** \*)

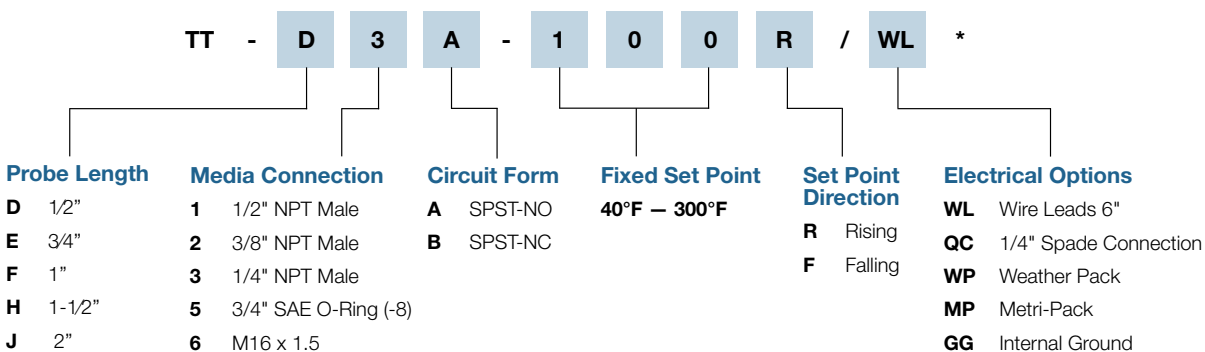

\* Defaults to Screw Terminals

To order call 800-333-7976 or email [info@partdeal.com](mailto:info@partdeal.com) PARTDEAL.COM